


Electronic Sounder and Beacon

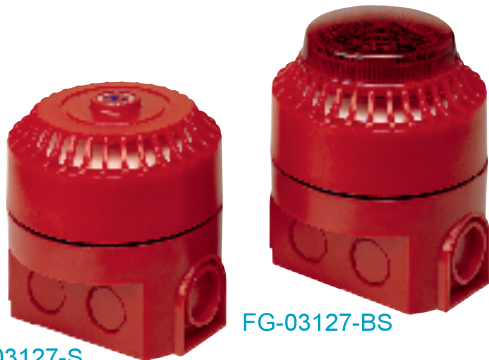

FG-03127-S

FG-03127-BS

General

This electronic sounder is designed for use within fire alarm systems, security systems and industrial signaling systems. Combined sounder and beacon provides an audio-visual warning which is suitable for place where is require high sound output and visual indication.

Features

- 32 signaling tones selectable by Dip switch.
- High sound output with low current consumption.
- 12/24V DC operation in the same unit, no adjustment is required.
- High efficiency lens for maximum light output.
- Volume Control as standard.
- Two sets of IN and OUT terminals, easy for installation.

Electronic Sounder and Beacon

Specification

Model	FG-03127-S	FG-03127-BS
Voltage Range	12~24V DC	
Current Consumption	14.5mA	
24V DC (tone 3)		
Sound Output 24V DC	Max. 114	
dB (A) at 1 meter		
Volume Control	0 to -20dB adjustment	
Ingress Protection	IP42	
Ambient Temperature	-25°C~+80°C	
Material	ABS plastic	
Dimensions	92.5mm(Dia.)	92.5mm(Dia.)
	x 94mm(H)	x 110mm(H)
Weight	254g	278g

Order Information

FG-03127-S	Electronic Sounder
FG-03127-BS	Electronic Sounder & Beacon